



MultiOne GSM



Miniature GSM communicator

- 1 optocoupler (voltage) input
- 1 output, 230VAC/24VDC, NO/NC relay output
- Power supply: 16-24 VAC or 10-35 VDC
- SMS sending to a predefined user phone number
- Output control by phone numbers which are stored on the SIM card (250/500), or control without caller ID
- Programming by SMS or with DIP switch



EasyCon GSM



Miniature GSM communicator and remote controller (6 x 3 cm!)

- 2 contact driven inputs
- 1 Open Collector output
- Can be controlled with voice call from 1000 numbers and with SMS from unlimited numbers
- SMS forwarding and voice message to 8 numbers
- Programming via SMS, PC, Android and Internet



ProCon GSM



GSM/GPRS communicator and remote controller with stand alone alarm system function

- 5 contact driven inputs
- 1 NO/NC relay output which is controllable with SMS and voice call from 1000 phone number
- Sending SMS, voice message, Contact ID
- Programming via SMS, PC, Android and Internet
- Extension possibility, possibility of connecting a battery, event list



EasyLine GSM



Plug & Play miniature telephone PSTN line simulator (6 x 4 cm!)

- 1 SMS contact input, 1 OC output
- Forwarding SMS to the user
- Forwarding Contact ID, 4/2 protocol to the monitoring station
- Programming via SMS and telephone
- Output control with stored phone numbers



ProLine GSM



Professional PSTN telephone line simulator

- Monitoring and checking (PSTN) line
- 2 contact driven inputs, 1 OC output that is controllable from 1000 phone numbers free of charge
- Forwarding SMS or/and voice message to 8 telephone numbers
- Forwarding Contact ID, 4/2 protocol to the monitoring station
- Convert Contact ID to SMS (coupling 250 zones / 250 events)
- Expansion modules, possibility of connecting a battery, event list




InterCom GSM



GSM module compatible with 4-flat entryphone system

- 2 relayed outputs that can be controlled during a call by DTMF codes
- Gate opening function that is free of charge from 1000 telephone numbers
- Power source monitoring function
- Event log of 16.000 entries, continuous GSM signal strength monitoring
- Night mode, possibility of connecting a battery

- CONTROLLING
- COMFORT
- SECURITY
- ENERGY EFFICIENCY
- COMMUNICATION

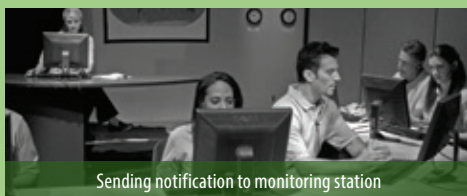

Sending notification to monitoring station



Backup phone line besides the existing one



Taxi caller



GSM forwarder to any alarm center



Automation: gate – barrier, garage



GSM line for APS (Analog Phone System)



Wireless entryphone



Controlling household appliances
(air conditioner, heating, sauna, lighting, irrigation system)

AJS Anti-Jammer System: the product can detect GSM jammers; **Bluetooth:** the product can be programmed using Bluetooth connection; **48/72 V:** the module can simulate telephone line; **3 years warranty:** the product comes with 3 years manufacturer warranty; **Voice menu:** the module can be programmed with human-voice menu system with the use of phone buttons; **Plug&Play:** the module can be easily installed, no need of programming; **ProRead:** professional programming software to program the module via PC with USB or Bluetooth connection; **AndroRead:** Android based application to program and control our GSM modules via Bluetooth connection; **Dual Memory:** settings are stored at two places on the module

	EasyLine GSM	ProLine GSM	MultiOne GSM	EasyCon GSM	ProCon GSM	InterCom GSM
Inputs	1	2	1	2	4 (+1)	4
Outputs	1	1(+3)	1	1	1 (+3)	2
User phone numbers for notification sending	1	8	1	8	8	4 x 2
Monitoring station phone numbers	✗	2	✗	2	2	✗
Caller identification	✓	✓	✓	✓	✓	✓
User phone numbers for output control	SIM	∞/1000	SIM	∞/1000		
Phone line simulation	✓	✓	✗	✗	✗	✗
Transmission channel	GSM/SMS	PSTN/GSM/SMS/GPRS	GSM/SMS	GSM/SMS	GSM/SMS/GPRS	GSM/SMS/GPRS
Event list / number of stored events	✗	16000	✗	16 000		
Expandability	✗	✓	✗	✗	✓	✗
Battery connection options	✗	✓	✗	✗	✓	✓
Programming method	SMS	SMS/PC (USB/Bluetooth) Internet	SMS	SMS/PC (USB/Bluetooth) Internet		
Current drain	80mA/1000mA	80mA/1000mA	12V@25mA/700mA 24V@15mA/350mA	25mA /700mA	30mA /700mA	40mA /700mA

COMPATIBLE ACCESSORIES

PROGRAMMERS



WiFi

EXPANSION PANELS



ANTENNAS



OTHER ACCESSORIES

